

Magnat



www.magnat.de/en



[@magnat_audio](https://www.instagram.com/magnat_audio)




[@magnataudio](https://www.facebook.com/magnataudio)



[@magnataudioprodukte](https://www.youtube.com/magnataudioprodukte)



Magical

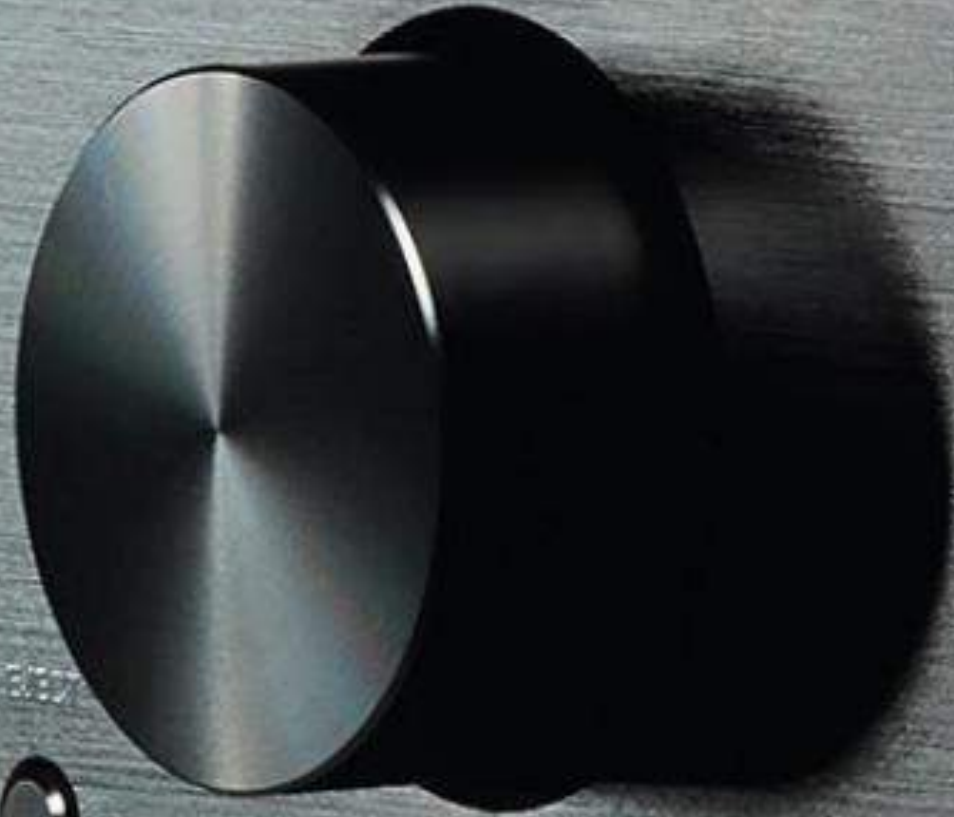

Electroniche

MA 900

STEREO HYBRID INTEGRATED AMPLIFIER



Shipping: Single

Part Number:

- D149515R (Black)

FREQUENCY RESPONSE	CD/Streamer/Aux/Line/Tape/Tuner: 6 Hz - 100 kHz (-3dB) 20 Hz - 20 kHz (+/- 0.2 dB) Phono: 20 Hz - 20 kHz (+/- 0.3 Hz) Subsonic filter: 16 Hz, 18 dB/Oct
DIGITAL INPUTS	Optical (Toslink™) / Coaxial (cinch) Supported sampling frequencies: 44.1/48/88.2/96/176.4/192 kHz Supported bit depth: 16/24 bits
POWER CONSUMPTION	Maximum: 700 W Standby: < 0.5 W
INPUT SENSITIVITY	CD/Tuner/Aux/Line/Tape: 470 mV/100.000 Ohms Phono MM: 5 mV/47.000 Ohms
BLUETOOTH INPUT	Bluetooth® streaming (5.0) with the high-end audio standard Qualcomm® aptX™
S/N RATIO	CD/Streamer/Aux/Line 102 dB (A), Phono MM 82 dB (A)
DIMENSIONS (WxHxD)	Main unit: 433 x 162 x 316 mm
WEIGHT	11.7 kg

MA 700

STEREO HYBRID INTEGRATED AMPLIFIER



Shipping: Single

Part Number:

- D149517 (Black)

FREQUENCY RESPONSE	CD/Streamer/Aux/Line/Tape/Tuner: 5 Hz - 100 kHz (-3dB) 20 Hz - 20 kHz (+/- 0.3 dB) Phono: 20 Hz - 20 kHz (+/- 0.8 Hz) Subsonic filter: 16 Hz, 18 dB/Oct
DIGITAL INPUTS	Optical (Toslink™) / Coaxial (cinch) Supported sampling frequencies: 44.1/48/88.2/96/176.4/192 kHz Supported bit depth: 16/24 bits
POWER CONSUMPTION	Maximum: 300 W Standby: < 0.5 W
INPUT SENSITIVITY	CD/Tuner/Aux/Line/Tape: 470 mV/100.000 Ohms Phono MM: 5 mV/47.000 Ohms
BLUETOOTH INPUT	Bluetooth® streaming (5.0) with the high-end audio standard Qualcomm® aptX™
S/N RATIO	CD/Streamer/Aux/Line 102 dB (A), Phono MM 82 dB (A)
DIMENSIONS (WxHxD)	Main unit: 433 x 116 x 300 mm
WEIGHT	7.4 kg

MR 780

HYBRID STEREO RECEIVER



Shipping: Single

Part Number:

- D149518R (Black)

FREQUENCY RANGE DAB/DAB+	174.928 – 239.2 MHz (Band III)
SENSITIVITY FM	-108 dBm
FREQUENCY RANGE FM	87.5 – 108 MHz
FREQUENCY RESPONSE	CD/Aux/Line/Tape/Tuner: 6 Hz - 90 kHz (-3 dB) 20 Hz - 20 kHz (+/- 0.3 dB) Phono: 20 Hz - 20 kHz (+/- 0.8 Hz) Subsonic filter: 16 Hz, 18 dB/Oct
DIGITAL INPUTS	Optical (Toslink™) / Coaxial (cinch) Supported sampling frequencies: 44.1/48/88.2/96/176.4/192 kHz Supported bit depth: 16/24 bits, USB 2.0 type B
POWER CONSUMPTION	Maximum: 300 W Standby: < 0.5 W
INPUT SENSITIVITY	CD/Tuner/Aux/Line/Tape: 470 mv/100.000 Ohms Phono MM: 5 mV/47.000 Ohms
BLUETOOTH INPUT	Bluetooth® (4.0) with the high-end audio standard Qualcomm® aptX™
S/N RATIO	CD/Streamer/Aux/Line 102 dB (A), Phono MM 82 dB (A)
DIMENSIONS (WxHxD)	Main unit: 433 x 132 x 317 mm
WEIGHT	8.9 kg

MC 400

COMPACT HIGH-END STEREO NETWORK/CD/DAB/FM RECEIVER



Shipping: Single

Part Number:

- D149524 (Black)

FREQUENCY RANGE DAB/DAB+	174.928 – 239.2 MHz (Band III)
FREQUENCY RANGE FM	87.5 – 108 MHz
SENSITIVITY FM & DAB/DAB+	-108 dBm / -100 dBm
FREQUENCY RESPONSE	CD/Streamer/Aux/Line: 10 Hz - 80 kHz (-3 dB) 20 Hz - 20 kHz (+/- 0.5 dB) Phono: 20 Hz - 20 kHz (+/- 0.8 Hz) Subsonic filter: 16 Hz, 18 dB/Oct
DIGITAL INPUTS	1 x HDMI Ver. 1.4 (PCM) / 1 x USB A Ver. 1.1, 5V/DC 1000mA Optical (Toslink™) / Coaxial (cinch) Supported sampling frequencies: 44.1/48/88.2/96/176.4/192 kHz Supported bit depth: 16/24 bits
POWER CONSUMPTION	Maximum: 300 W Standby: < 0.5 W
INPUT SENSITIVITY	CD/Streamer/Aux/Line: 500 mv/100.000 Ohms Phono MM: 5 mV/47.000 Ohms
BLUETOOTH INPUT	Bluetooth® streaming (5.0) with the high-end audio standard Qualcomm® aptX™
S/N RATIO	CD/Streamer/Aux/Line 92 dB (A), Phono MM 82 dB (A)
DIMENSIONS (WxHxD)	Main unit: 433 x 15 x 301 mm
WEIGHT	6.9 kg

MC 200

NETWORK PLAYER



Shipping: Single

Part Number:

- D149522R (Black)

FREQUENCY RANGE DAB/DAB+	174.928 – 239.2 MHz (Band III)
FREQUENCY RANGE FM	87.5 – 108 MHz
SENSITIVITY FM & DAB/DAB+	-108 dBm / -100 dBm
FREQUENCY RESPONSE	CD/Aux/Line: 10 Hz - 80 kHz (-3 dB) 20 Hz - 20 kHz (+/- 0.5 dB)
DIGITAL INPUTS	Optical (Toslink™) / Coaxial (cinch) Supported sampling frequencies: 44.1/48/88.2/96/176.4/192 kHz Supported bit depth: 16/24 bits
POWER CONSUMPTION	Maximum: 130 W Standby: < 0.5 W
INPUT SENSITIVITY	Aux/Line: 470 mv/100.000 Ohms
BLUETOOTH INPUT	Bluetooth® (4.1) with the high-end audio standard Qualcomm® aptX™
S/N RATIO	CD/Aux/Line 98 dB (A)
DIMENSIONS (WxHxD)	Main unit: 277 x 132 x 330 mm
WEIGHT	5.8 kg

MTT 990

TURNTABLE WITH CARTRIDGE

Audio Technica AT 95E with elliptical stylus



PRINCIPLE	Quartz-controlled direct drive
SPEEDS	33 1/3, 45, 78 rpm
WOW & FLUTTER	< 0.08% (33 /13 rpm)
SIGNAL/NOISE RADIO (A-WEIGHTED)	> 72 dB
SIGNAL/NOISE RADIO (UNWEIGHTED)	> 65 dB
TORQUE	> 2.2 kgf cm
PLATTER DIAMETER	305 mm
PLATTER WEIGHT (NET)	1.9 kg
TO NEARM LENGTH	10"
FOR CARTRIDGES WEIGHTING	3 - 10 g
FOR CARTRIDGES WITH A DYNAMIC COMPLIANCE OF	Medium / Medium-stiff
OVERHANG	15.3 mm
OFFSET ANGLE	21.4°
WEIGHT OF HEADSHELL	9 g
ADJUSTMENT RANGE OF TRACKING FORCE	0 - 40 mN / 0 - 4.0 g
ADJUSTMENT RANGE OF ANTISCATING	Analogue to tracking force
VTA (HEIGHT ADJUSTMENT)	6 mm
CABINET SURFACE	Piano Black
DIMENSIONS (WxHxD)	Cover closed: 450 x 162 x 367 mm (Open: 450 x 412 x 412 mm)
WEIGHT	11 kg

Shipping: Single

Part Number:

- D149700 (Black)



Serie Signature Edelstein

SIGNATURE EDELSTEIN

SPECIFICATIONS

Principle	2 way, bass reflex
Equipment	1 x 4.5" woofer-midrange, 1" dome-tweeter
Power Handling (RMS/Max)	75 / 150 Watts
Impedance	4 - 8 Ohms
Frequency Response (-6db)	45 - 38.000 Hz
Frequency range	34 - 50.000 Hz
Crossover Frequencies	2400 Hz
Recommended Amplifier Output	> 30 Watts
Sensitivity	90 dB
Cabinet surface	Body: white or black satin lacquer Front panel and base plate: brushed and anodized aluminum Base plate (middle section): polished acrylic glass
Accessories	- Detachable fabric grille with optimized acoustic transmissivity and practical magnetic mounts - Manual
Dimensions (WxHxD)	135 x 232 x 246 mm
Weight	5,0 kg
Article Number	D147270 (black) D147272 (white)
EAN Code	4018843472706 (black) 4018843472720 (white)





Serie Signature 900

SIGNATURE 999

SPECIFICATIONS

Principle	4.5 way, double bass, bass reflex
Drivers	2 x 8" woofer, 6.5" midrange, 2 x 1.2" dome-tweeter, 0.75" super-tweeter
Power Handling (RMS/Max)	280 / 500 Watts
Impedance	4 – 8 Ohms
Frequency Response (-6db)	31 – 42.000 Hz
Frequency range	22 – 55.000 Hz
Crossover Frequencies	320 Hz / 2200 Hz / 12000 Hz / 16000 Hz
Recommended Amplifier Output	> 30 Watts
Sensitivity	93 dB
Cabinet surface	Black satin
Accessories	- Detachable fabric grille with optimized acoustic transmissivity and practical magnetic mounts - Manual
Dimensions (WxHxD)	Cabinet: 260 x 1175 x 402 mm cabinet incl. foot and spikes: 335 x 1225 x 420 mm
Weight	37.5 kg
Article Number	D147299
EAN Code	4018843472997





Serie Signature 700

SIGNATURE 707

PRINCIPLE	4 way, double bass, bass reflex
DRIVERS	2 x 6.5" woofer, 6.5" midrange, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	220 / 380 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	22 - 54.000 Hz
CROSSOVER FREQUENCIES	350 Hz, 2.700 Hz, 17.000 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 30 W
SENSITIVITY	92 dB
DIMENSIONS (WxHxD)	210 x 1055 x 345 mm (290 x 1070 x 345 mm incl. feet and terminal)
WEIGHT	23.4 kg

Shipping: Single

Part Number:

- D147239 (Black)
- D147240 (White)



SIGNATURE 703

PRINCIPLE	3 way, bass reflex
DRIVERS	6.5" midwoofer, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	110 / 180 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	31 - 54.000 Hz
CROSSOVER FREQUENCIES	2.700 Hz, 17.000 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 20 W
SENSITIVITY	91 dB
DIMENSIONS (WxHxD)	210 x 372 x 305 mm
WEIGHT	7.7 kg

Shipping: Pair

Part Number:

- D147236 (Black)
- D147237 (White)





Serie Signature 500

SIGNATURE 507

PRINCIPLE	4 way, double bass, bass reflex
DRIVERS	2 x 6.5" woofer, 6.5" midrange, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	200 / 350 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	31 - 54.000 Hz
CROSSOVER FREQUENCIES	400 Hz, 2.800 Hz, 17.500 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 30 W
SENSITIVITY	92 dB
CABINET SURFACE	Front: Piano Black / Cabinet : Ash Decor Black Front: Anthracite Satin / Cabinet : Ash Decor Mocca
DIMENSIONS (WxHxD)	205 x 1030 x 332 mm (286 x 1070 x 332 mm incl. feet and terminal)
WEIGHT	18.8 kg

Shipping: Single

Part Number:

- D146220 (Black)



SIGNATURE 503

PRINCIPLE	3 way, bass reflex
DRIVERS	6.5" midwoofer, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	100 / 170 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	32 - 53.000 Hz
CROSSOVER FREQUENCIES	2.800 Hz, 17.500 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 20 W
SENSITIVITY	91 dB
DIMENSIONS (WxHxD)	205 x 365 x 282 mm
CABINET SURFACE	Front: Piano Black / Cabinet : Ash Decor Black Front: Anthracite Satin / Cabinet : Ash Decor Mocca
WEIGHT	6.1 kg

Shipping: Pair

Part Number:

- D146200 (Black)





Centrali Signature

SIGNATURE CENTER PRO

PRINCIPLE	3 way, double bass, bass reflex
DRIVERS	2 x 4.5" woofer, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	120 / 190 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	32 - 54.000 Hz
CROSSOVER FREQUENCIES	2.600 Hz, 17.000 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 20 W
SENSITIVITY	91 dB
DIMENSIONS (WxHxD)	520 x 200 x 275 mm
WEIGHT	10 kg

Shipping: Single

Part Number:

- D147247 (Black)
- D147248 (White)



SIGNATURE CENTER

PRINCIPLE	3 way, double bass, bass reflex
DRIVERS	2 x 4.5" woofer-midrange, 1.2" dome-tweeter, 0.75" super-tweeter
POWER HANDLING (RMS/Max)	110 / 180 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	32 - 53.000 Hz
CROSSOVER FREQUENCIES	2.600 Hz, 17.500 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 20 W
SENSITIVITY	91 dB
DIMENSIONS (WxHxD)	550 x 205 x 282 mm
WEIGHT	9.1 kg

Shipping: Single

Part Number:

- D147234 (Black)





Serie Monitor S

MONITOR S80 ATM

PRINCIPLE	2 way, bass reflex, Dolby Atmos module
DRIVERS	2 x 6.5" woofer-midrange, 1.1" dome-tweeter, 4.5" coaxial speaker
POWER HANDLING (RMS/Max)	Main: 160 / 300 W - Dolby Atmos speaker: 40 / 80 W
IMPEDANCE	Main: 4 Ohms - Dolby Atmos speaker: 4 Ohms
FREQUENCY RESPONSE	Main: 26 - 38.000 Hz - Dolby Atmos speaker: 60 - 28.000 Hz
CROSSOVER FREQUENCIES	Main: 500 Hz, 3.000 Hz - Dolby Atmos speaker: 7.000 Hz
RECOMMENDED AMPLIFIER OUTPUT	Main: 30 - 300 W - Dolby Atmos speaker: 15 - 80 W
SENSITIVITY	Main : 90 dB - Dolby Atmos speaker: 87 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	215 x 860 x 270 mm
WEIGHT	13.4 kg

Shipping: Single

Part Number:

- D144806 (Black)
- D144807 (Walnut)



MONITOR S70

PRINCIPLE	3 way, bass reflex
DRIVERS	2 x 6.5" woofer, 6.5" midrange, 1.2" dome-tweeter
POWER HANDLING (RMS/Max)	190 / 380 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	19 - 38.000 Hz
CROSSOVER FREQUENCIES	400 Hz, 2.900 Hz
RECOMMENDED AMPLIFIER OUTPUT	30 - 380 W
SENSITIVITY	91 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	215 x 960 x 310 mm
WEIGHT	15 kg

Shipping: Single

Part Number:

- D144804 (Black)
- D144805 (Walnut)



MONITOR S30

PRINCIPLE	2 way, bass reflex
DRIVERS	6.5" woofer-midrange, 1.1" dome-tweeter
POWER HANDLING (RMS/Max)	100 / 200 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	34 - 38.000 Hz
CROSSOVER FREQUENCIES	2.900 Hz
RECOMMENDED AMPLIFIER OUTPUT	30 - 200 W
SENSITIVITY	90 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	215 x 354 x 270 mm
WEIGHT	5.8 kg

Shipping: Pair

Part Number:

- D144802P (Black)
- D144803P (Walnut)



MONITOR S10

PRINCIPLE	3 way, bass reflex
DRIVERS	2 x 4.5" woofer-midrange, 0.5" dome-tweeter
POWER HANDLING (RMS/Max)	60 / 120 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	42 - 32.000 Hz
CROSSOVER FREQUENCIES	3.400 Hz
RECOMMENDED AMPLIFIER OUTPUT	20 - 120 W
SENSITIVITY	88 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	149 x 250 x 190 mm
WEIGHT	2.5 kg

Shipping: Pair

Part Number:

- D144800P (Black)
- D144801P (Walnut)



MONITOR S10D

PRINCIPLE	2 way (di-pole), bookshelf and on-wall speaker
DRIVERS	4.5" woofer-midrange, 3 x 0.5" dome-tweeter
POWER HANDLING (RMS/Max)	60 / 120 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	42 - 32.000 Hz
CROSSOVER FREQUENCIES	3.400 Hz
RECOMMENDED AMPLIFIER OUTPUT	20 - 120 W
SENSITIVITY	88 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	149 x 250 x 130 mm
WEIGHT	2.2 kg

Shipping: Pair

Part Number:

- D144814P (Black)
- D144815P (Walnut)



MONITOR S14C

PRINCIPLE	2 way, bass reflex
DRIVERS	2 x 4.5" woofer, 2 x 4.5" woofer-midrange, 1.1" dome-tweeter
POWER HANDLING (RMS/Max)	100 / 200 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	38 - 38.000 Hz
CROSSOVER FREQUENCIES	500 Hz, 2.700 Hz
RECOMMENDED AMPLIFIER OUTPUT	30 - 200 W
SENSITIVITY	90 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	700 x 150 x 190 mm
WEIGHT	7 kg



Shipping: Single

Part Number:

- D144810 (Black)
- D144811 (Walnut)

MONITOR S12C

PRINCIPLE	2 way, bass reflex
DRIVERS	2 x 4.5" woofer-midrange, 0.5" dome-tweeter
POWER HANDLING (RMS/Max)	75 / 150 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	40 - 32.000 Hz
CROSSOVER FREQUENCIES	3.400 Hz
RECOMMENDED AMPLIFIER OUTPUT	20 - 150 W
SENSITIVITY	89 dB
CABINET SURFACE	Black, Walnut
DIMENSIONS (WxHxD)	420 x 148 x 190 mm
WEIGHT	3.9 kg



Shipping: Single

Part Number:

- D144808 (Black)
- D144809 (Walnut)



Serie Cinema Ultra

CINEMA ULTRA LCR 100-THX

PRINCIPLE	THX® Ultra2-certified LCR Speaker, 2 way, sealed
DRIVERS	2 x 6.5" woofer-midrange, 1.65" dome-tweeter
POWER HANDLING (RMS/Max)	220 / 350 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	80 - 27.000 Hz
CROSSOVER FREQUENCIES	1.550 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 50 W
SENSITIVITY	93 dB
CABINET SURFACE	Front: black silk matt / Body: textured film - anthracite
DIMENSIONS (WxHxD)	280 x 520 x 188 mm
WEIGHT	12.5 kg

Shipping: Single

Part Number:

- D148300 (Black)



CINEMA ULTRA RD 200-THX

PRINCIPLE	THX® Ultra2-certified dipole surround speaker, 2 way, sealed
DRIVERS	170 mm woofer-midrange, 2 x 1.65" dome-tweeter
POWER HANDLING (RMS/Max)	150 / 240 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	80 - 27.000 Hz
CROSSOVER FREQUENCIES	1.500 Hz
RECOMMENDED AMPLIFIER OUTPUT	> 40 W
SENSITIVITY	89 dB
CABINET SURFACE	Front: black silk matt / Body: textured film - anthracite
DIMENSIONS (WxHxD)	400 x 300 x 160 mm
WEIGHT	7.6 kg

Shipping: Pair

Part Number:

- D148305 (Black)



CINEMA ULTRA SUB 300-THX

PRINCIPLE	THX® Ultra2-certified active high-performance subwoofer dual passive radiator
DRIVERS	320 mm subwoofer, 2 x 320 mm passive radiator
OUTPUT POWER (RMS/Max)	550 / 1100 W
PHASE	0° to 180° continuously variable
FREQUENCY RESPONSE	18 - 200 Hz
CROSSOVER FREQUENCIES	THX: without filtering Line-Modus: 40-180 Hz
CABINET SURFACE	Front: black silk matt / Body: textured film - anthracite
DIMENSIONS (WxHxD)	468 x 461 x 460 mm (468 x 461 x 478 mm incl. amplifier)
WEIGHT	32.5 kg

Shipping: Single

Part Number:

- D148310 (Black)



CINEMA ULTRA AEH 400-ATM

PRINCIPLE	Dolby Atmos-enabled high-performance add-on loudspeaker with direct-radiating mode
DRIVERS	5.25" coaxial speaker
POWER HANDLING (RMS/Max)	50 / 120 W
IMPEDANCE	6 Ohms
FREQUENCY RESPONSE	45 - 37.000 Hz
CROSSOVER FREQUENCIES	Atmos-Modus : 3.200 Hz / Direct-Modus : 3.300 Hz
RECOMMENDED AMPLIFIER OUTPUT	20 - 120 W
SENSITIVITY	89 dB
CABINET SURFACE	Front: black silk matt / Body: textured film - anthracite
DIMENSIONS (WxHxD)	280 x 150 x 188 mm
WEIGHT	3.7 kg

Shipping: Pair

Part Number:

- D148400 (Black)



CINEMA STAR 5.1

- Sistema audio video 5.1
 - Composto da: 1 subwoofer, 1 canale centrale, 1 diffusori frontali e 2 diffusori posteriori
 - Subwoofer: 1 x woofer da 17 cm – 40-100W
 - Canale centrale: 2 x woofer da 8,5 cm e 1 x tweeter da 1 cm – 60-120W
 - Diffusori frontali: 1 x woofer da 8,5 cm e 1 x tweeter da 1 cm – 50-100W
 - Satelliti posteriori: 1 x woofer da 8,5 cm e 1 x tweeter da 1 cm – 50-100W
 - Dimensioni subwoofer: 22,5 x 38 x 35 cm
 - Peso subwoofer: 7,7 kg
 - Dimensioni canale centrale: 21 x 9 x 11 cm
 - Peso canale centrale: 1,6 kg
 - Dimensioni satellite: 9 x 11 x 11 cm
 - Peso satellite: 0,9 kg
- Solo pochi pezzi disponibili

Shipping: Single

Part Number:

- D158880 (Black)





Serie Transpuls

TRANSPULS 1500

PRINCIPLE	3 way CRA bass reflex
DRIVERS	15" woofer, 6.5" midrange, 2 x 1" horn-dome tweeter
POWER HANDLING (RMS/Max)	250 / 500 W
IMPEDANCE	4 - 8 Ohms
FREQUENCY RESPONSE	16 - 35.000 Hz
CROSSOVER FREQUENCIES	920 Hz, 4800 Hz
RECOMMENDED AMPLIFIER OUTPUT	30 - 500 W
SENSITIVITY	95 dB
CABINET SURFACE	Dark Wood
DIMENSIONS (WxHxD)	514 x 1000 x 385 mm
WEIGHT	37 kg

Shipping: Single

Part Number:

- D1009450 (Dark Wood)



TRANSPULS 800A

PRINCIPLE	2 way bass reflex, active
DRIVERS	6.5" woofer-midrange, 1" horn-dome tweeter
POWER HANDLING (RMS/Max)	Active
OUTPUT POWER (RMS/Max)	2 x 60 / 2 x 120 W
MAINS VOLTAGE	100 - 240 V
FREQUENCY RESPONSE	34 - 32.000 Hz
CROSSOVER FREQUENCIES	3.100 Hz
OPERATING FREQUENCY	2402 - 2480 MHz
MAXIMUM EMITTED POWER (EN 62479)	-3.01 dBm
IMPEDANCE	Active
DIMENSIONS (WxHxD)	240 x 385 x 215 mm
WEIGHT	Active speaker : 7.4 kg / Passive speaker : 6.5 kg

Shipping: Pair

Part Number:

- D1009480 (Dark Wood)





Subwoofer & moduli Atmos

OMEGA CS 12

PRINCIPLE	Active closed subwoofer, 'frontfire'
DRIVERS	12" powered subwoofer
OUTPUT POWER (RMS/Max)	525 / 1100 W
PHASE	0° - 180° adjustable
FREQUENCY RESPONSE	18 - 200 Hz
CROSSOVER FREQUENCIES	50 - 150 Hz adjustable
DIMENSIONS (WxHxD)	385 x 400 x 450 mm (385 x 400 x 465 mm incl. amplifier)
WEIGHT	24 kg

Shipping: Single

Part Number:

- D14242270 (Black)
- D14242272 (White)



ALPHA RS 12

PRINCIPLE	Active bass reflex subwoofer
DRIVERS	300 mm woofer
OUTPUT POWER (RMS/Max)	120 / 240 W
FREQUENCY RESPONSE	20 - 200 Hz
CROSSOVER FREQUENCIES	50 - 150 Hz adjustable
DIMENSIONS (WxHxD)	360 x 465 x 440 mm
WEIGHT	14.1 kg

Shipping: Single

Part Number:

- D14242260 (Black)



ALPHA RS 8

PRINCIPLE	Active bass reflex subwoofer
DRIVERS	200 mm woofer
OUTPUT POWER (RMS/Max)	80 / 160 W
FREQUENCY RESPONSE	25 - 200 Hz
CROSSOVER FREQUENCIES	50 - 150 Hz adjustable
DIMENSIONS (WxHxD)	260 x 350 x 350 mm
WEIGHT	8.5 kg

Shipping: Single

Part Number:

• D14242250 (Black)



ATM 202

PRINCIPLE	2 way, closed box
DRIVERS	5" coaxial speaker
POWER HANDLING (RMS/Max)	50 / 100 W
IMPEDANCE	6 Ohms
FREQUENCY RESPONSE	50 - 36.000 Hz
CROSSOVER FREQUENCIES	8.500 Hz
RECOMMENDED AMPLIFIER OUTPUT	20 - 100 W
SENSITIVITY	88 dB
CABINET SURFACE	Piano Black / Ash Decor Black - Piano White / White Decor
DIMENSIONS (WxHxD)	190 x 152 x 280 mm
WEIGHT	2.1 kg



Shipping: Pair

Part Number:

- D148450 (Black)
- D148452 (White)





Bluetooth Speakers

MONITOR REFERENCE 5A

PRINCIPLE	2.5 way bass reflex, active
DRIVERS	6.5" woofer, 6.5" woofer-midrange, 1" dome tweeter
POWER HANDLING (RMS/Max)	Active
OUTPUT POWER (RMS/Max)	2 x 60 / 2 x 120 W
MAINS VOLTAGE	100 - 240 V
FREQUENCY RESPONSE	25 - 40.000 Hz
CROSSOVER FREQUENCIES	3.200 Hz
IMPEDANCE	Active
DIMENSIONS (WxHxD)	205 x 908 x 282 mm
WEIGHT	Active speaker : 14.7 kg / Passive speaker : 13.8 kg

Shipping: Pair

Part Number:

- D172750 (Black)



MONITOR REFERENCE 2A

PRINCIPLE	2 way bass reflex, active
DRIVERS	5" woofer-midrange, 1" dome tweeter
POWER HANDLING (RMS/Max)	Active
OUTPUT POWER (RMS/Max)	2 x 35 / 2 x 75 W
MAINS VOLTAGE	100 - 240 V
FREQUENCY RESPONSE	38 - 40.000 Hz
CROSSOVER FREQUENCIES	3.500 Hz
IMPEDANCE	Active
DIMENSIONS (WxHxD)	175 x 290 x 205 mm
WEIGHT	Active speaker : 4.4 kg / Passive speaker : 3.8 kg

Shipping: Pair

Part Number:

- D172720 (Black)





Serie Symbol X

SYMBOL X 160

Drivers	1 x 5.25" woofer- midrange, 1 x 6.5" woofer- midrange
Power Handling (RMS/Max.)	110 / 200 watts
Impedance	4 – 8 Ohms
Frequency Response	34 - 36.500 Hz
Crossover Frequencies	3400 Hz
Recommended Amplifier Output	20 - 200 Watts
Dimensions (WxHxD)	186 x 310 x 242 mm (without wall mounting)
Highlights	IPX 5 certified, splash-proof
	Indoor/Outdoor bookshelf speakers
	Splash-proof by IPX5 standard, corrosion-resistant materials
	Integrated wall mounting device, horizontally and vertically adjustable
Weight	3.3 kg



Shipping: Pair

Part Number:

- D168400 (Black)
- D168405 (White)

SYMBOL X 130

Drivers	1 x 5.25" woofer- midrange, 140 mm midrange-woofer
Power Handling (RMS/Max.)	90 / 200 watts
Sensitivity (2.8V/1m)	90 dB
Impedance	4 – 8 Ohms
Frequency Response	34 - 36.500 Hz
Crossover Frequencies	3800 Hz
Recommended Amplifier Output	20 - 200 Watts
Dimensions (WxHxD)	151 x 249 x 197 mm (without wall mounting)
Highlights	IPX 5 certified, splash-proof
	Indoor/Outdoor bookshelf speakers
	Splash-proof by IPX5 standard, corrosion-resistant materials
	Integrated wall mounting device, horizontally and vertically adjustable
Weight	2.4 kg

Shipping: Pair

Part Number:

- D168410 (Black)
- D168415 (White)






In-Wall & In-Ceiling

INTERIOR IW 810

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	200 mm woofer, 1" tweeter
Power Handling (RMS/Max.)	100 / 180 watts
Sensitivity (2.8V/1m)	91 dB
Impedance	4 – 8 Ohms
Frequency Response	32 - 32000 Hz
Crossover Frequencies	3500 Hz
Recommended Amplifier Output	30 - 180 Watts
Mounting depth	90 mm
Outer Dimensions (WxH)	255 x 358 mm
Cutting Out (WxH)	224 x 335 mm
Highlights	High-End in-wall/in-ceiling loudspeaker Simple mounting with special mechanism

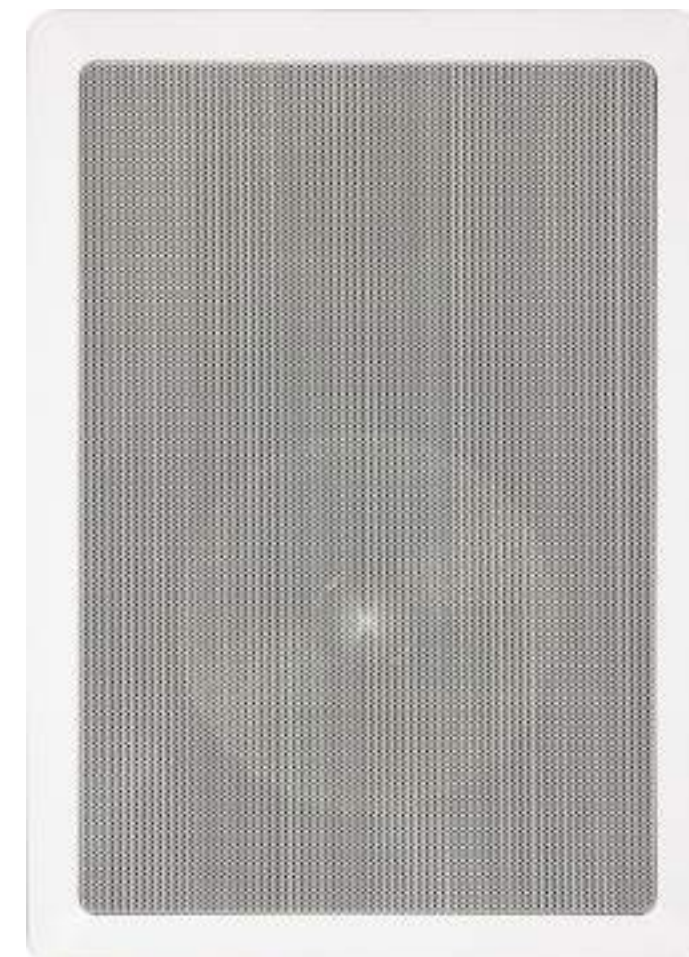

Shipping: Single

Part Number:

- D158810R (White)

INTERIOR IC 82

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	200 mm woofer 2 x 19 mm tweeter
Power Handling (RMS/Max.)	100 / 180 watts
Sensitivity (2.8V/1m)	91 dB
Impedance	4 – 8 Ohms
Frequency Response	32 - 35000 Hz
Crossover Frequencies	3500 Hz
Recommended Amplifier Output	20 - 180 Watts
Mounting depth	100 mm
Cutting Out Ø	238 mm
Outer Dimensions Ø	272 mm
Highlights	High-End in-wall/in-ceiling loudspeaker
	Multi-Directivity circuit to optimize the speaker to the room
	Simple mounting with special mechanism

Shipping: Single

Part Number:

- D158482R (White)



INTERIOR IC 62

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	160 mm woofer 2 x 19 mm tweeter
Power Handling (RMS/Max.)	75 / 140 watts
Sensitivity (2.8V/1m)	90 dB
Impedance	4 – 8 Ohms
Frequency Response	35 - 35000 Hz
Crossover Frequencies	3500 Hz
Recommended Amplifier Output	20 - 140 Watts
Mounting depth	80 mm
Cutting Out Ø	195 mm
Outer Dimensions Ø	228 mm
Highlights	High-End in-wall/in-ceiling loudspeaker
	Multi-Directivity circuit to optimize the speaker to the room
	Simple mounting with special mechanism

Shipping: Single

Part Number:

- D158462R (White)



INTERIOR ICP 82

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	19 mm tweeter 200 mm woofer
Power Handling (RMS/Max.)	80 / 140 watts
Sensitivity (2.8V/1m)	91 dB
Impedance	8 Ohms
Frequency Response	34 - 24000 Hz
Crossover Frequencies	4000 Hz
Recommended Amplifier Output	20 - 160 Watts
Mounting depth	102 mm
Cutting Out Ø	240 mm
Outer Dimensions Ø	275 mm
Weight	1,4 kg
Highlights	High-End in-wall/in-ceiling loudspeaker
	pecial clamping mechanism for easy installation
	Moisture-proof speaker system, suitable for use in humid rooms (bathroom)



Shipping: Single

Part Number:

- D158410 (White)



INTERIOR ICP 62

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	19 mm tweeter 160 mm woofer
Power Handling (RMS/Max.)	70 / 120 watts
Sensitivity (2.8V/1m)	90 dB
Impedance	8 Ohms
Frequency Response	36 - 24000 Hz
Crossover Frequencies	4000 Hz
Recommended Amplifier Output	20 - 140 Watts
Mounting depth	88 mm
Cutting Out Ø	198 mm
Outer Dimensions Ø	233 mm
Weight	1,0 kg
Highlights	High-End in-wall/in-ceiling loudspeaker
	pecial clamping mechanism for easy installation
	Moisture-proof speaker system, suitable for use in humid rooms (bathroom)



Shipping: Single

Part Number:

- D158405 (White)



INTERIOR ICP 52

Principle	2-way in-wall/in-ceiling loudspeaker
Drivers	5.25" woofer 19 mm tweeter
Power Handling (RMS/Max.)	60 / 100 watts
Sensitivity (2.8V/1m)	89 dB
Impedance	8 Ohms
Frequency Response	38 - 24000 Hz
Crossover Frequencies	4000 Hz
Recommended Amplifier Output	20 - 120 Watts
Mounting depth	81 mm
Cutting Out Ø	168 mm
Outer Dimensions Ø	202 mm
Weight	1,0 kg
Highlights	High-End in-wall/in-ceiling loudspeaker
	pecial clamping mechanism for easy installation
	Moisture-proof speaker system, suitable for use in humid rooms (bathroom)

Shipping: Single

Part Number:

- D158400 (White)



Magnat